cmc
THE SPECIALIFT

S20



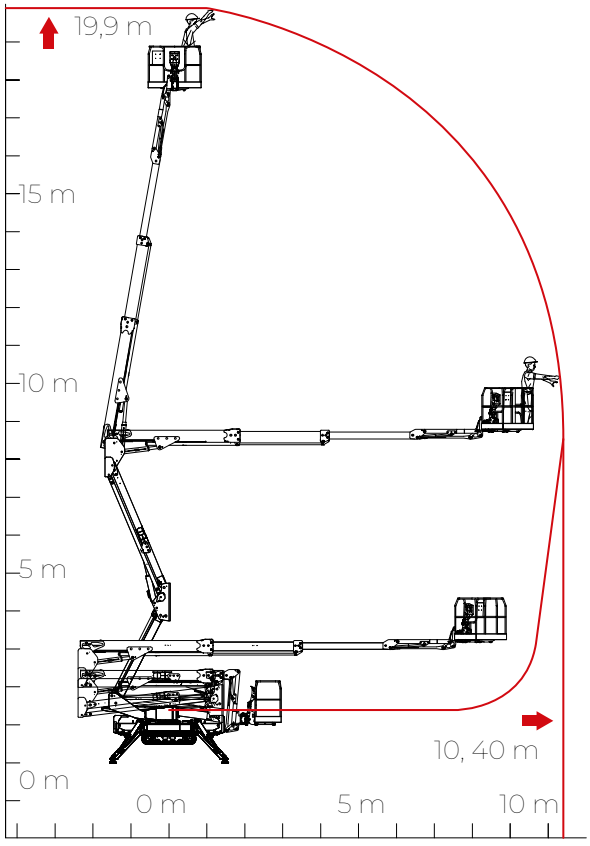
TECHNICAL SHEET

PERFORMANCE AND DIMENSIONS

Main features

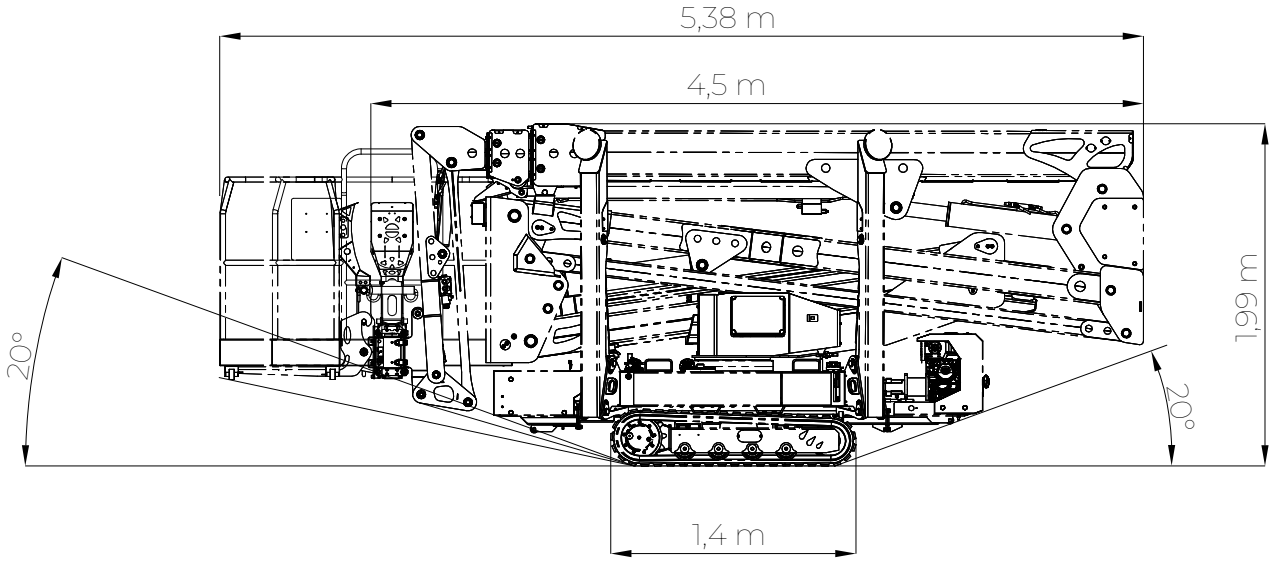
Honda iGX390 petrol engine; Hydraulically adjustable tracks in width; Black rubber tracks; Basket rotation +/-90°; Two-man basket 140x70x110 cm equipped with quick-release system and wheels; 200 Bar air/ water hose in the basket; 230V/120V/110V and 12V electrical socket in the basket; Protective covers for outrigger cylinders; Display with error code detection; Proportional hydraulic controls; Proportional travel mode by radio remote control; Lifting hooks; Fixing points for transport; Double travel speed; Automatic outriggers leveling; Standard painting (RAL 3000); 24-months warranty (see warranty condition).

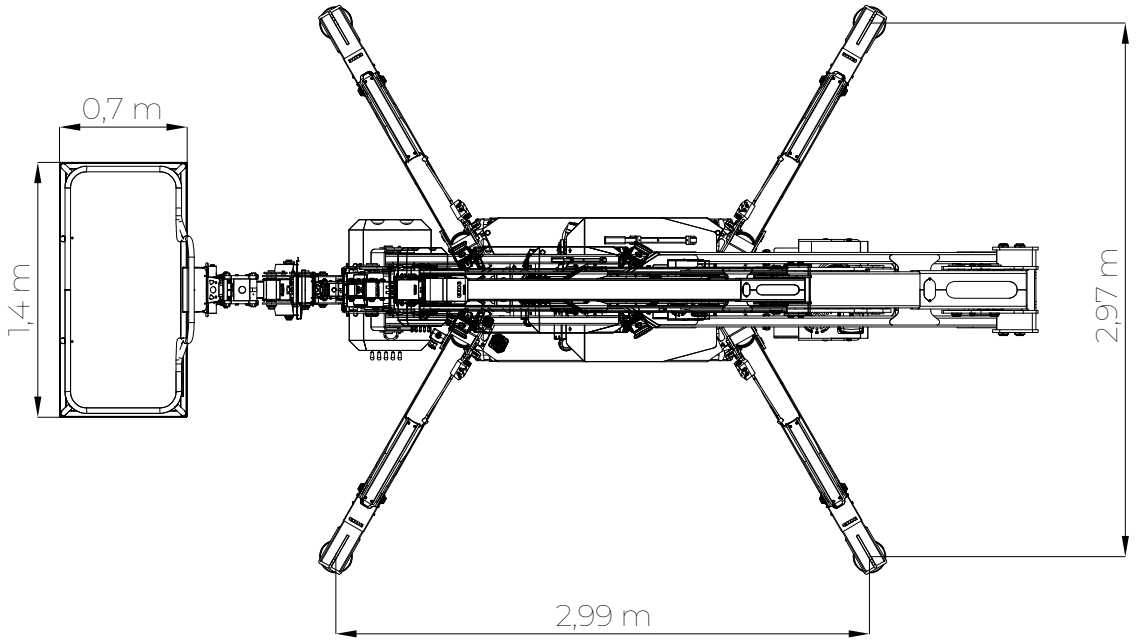
Max. working heigh	**19,9 m**
Max Outreach	**10,4 m**
Height at floor level	**17,9 m**
Max Weight in the basket	**230 kg**
Basket dimensions	**1,4 x 0,7 x 1,1 m**
Basket Rotation	**+/-90° (optional)**
Turret Rotation	**+/- 180° (360° non continuous)**
Total Weight	**2980 Kg**

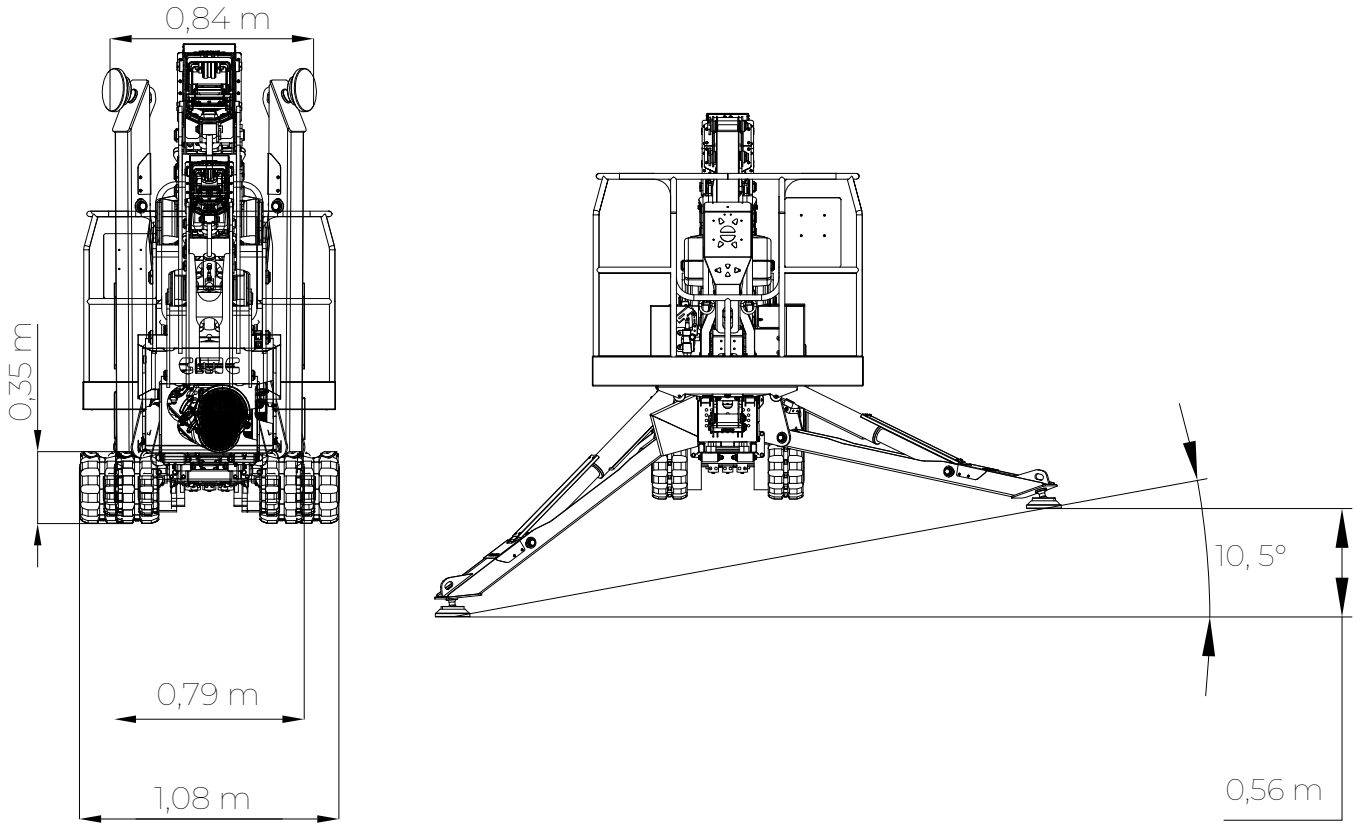


Via Bitritto, 119 - 70124 BARI - ITALY
Tel. +39 080 532 66 06 - Fax +39 080 536 85 41
www.cmclift.com - info@cmclift.com

CE
CERTIFICAZIONE DI PRODOTTO BUREAU VERITAS Certification
TÜV SÜD US
IPAF.org Member


5,38 m
4,5 m
1,99 m
20°
20°
1,4 m


0,7 m
1,4 m
2,97 m
2,99 m


0,84 m
0,35 m
0,79 m
1,08 m
10, 5°
0,56 m