

HD SERIES HEAVY DUTY







Strong, agile, high-performance. Ready to perform in any conditions.

Two platforms designed for the toughest jobs, which combine the great strength of the undercarriage with the maximum agility of the aerial part, composed of a single pantograph with a telescopic boom.

Thanks to their compact design, long outreach and articulated outriggers with high levelling capabilities, the HD series platforms are the undisputed leaders of the work in extreme conditions, with maximum operating working heights between 19m and 22m. They are able to operate in any condition and on any terrain and ensure maximum efficiency and safety, thanks to the Self Control System by CMC, an electronic system that automatically carries out most of the control and stabilisation operations.

S19HD

S22HD



BENEFITS



Easy to transport

Strong, but contained in weight, the CMC HD Series platforms are self-loading and easy to transport on a trailer. Thanks to their compact dimensions, they are also able to fit through a standard door.

Versatile to use

With their compact design, long lateral outreach, articulated outriggers with high levelling capability, and with the support of the automatic control system, the CMC HD Series platforms can reach anywhere and operate in all conditions.






Simply to use

The HD series platforms are equipped with the Self Control System by CMC, an electronic system that automatically carries out a series of operations: outrigger levelling, boom's movements control, closing of the aerial part, and reporting of any malfunctions.

FEATURES

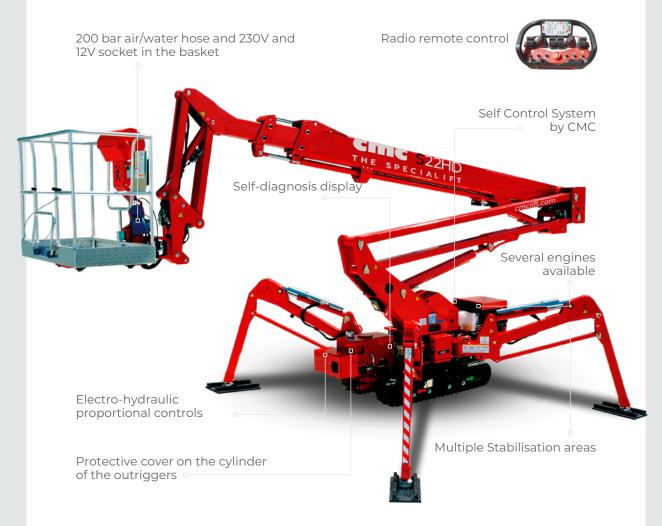

Some available options	S19HD	S22HD
Kubota Z602 diesel engine	•	•
Full lithium battery version (160Ah)	•	•
230V, 120V, 110V electric motor	•	•
Hydraulically adjustable undercarriage	•	•
Basket rotation (+90°/-87°)	•	•
Non-marking grey tracks	•	•
Double travel speed	•	•
1 or 2 man fibreglass basket	•	•
2 man basket with quick release system and wheels		•
Remote connection with Sim Card and GPS Locator	•	•
Customisable colours	•	•

CMC PLATFORMS APPLICATIONS



Refurbishment building works

even in places with difficult access such as worship places, historical buildings, hotels, and shopping centres.

Facilities management

mainly in restricted traffic areas or in locations that are difficult for truck-mounted platforms.



Pruning tall trees

and even operating in tight spaces inside private homes on particularly delicate turf.



TECHNICAL DATA

S19HD


PERFORMANCE AND DIMENSIONS




Main features

This articulated platform with pantograph and telescopic boom offers outstanding performance thanks to its outriggers of high levelling capacity. Designed for maximum work performance on the toughest terrain, it's an excellent alternative to a truck-mounted platform.

18,7 m	Max. working height
11,4 m	Max. outreach
16,7 m	Platform height
220 kg	Max. load in basket
1,4 x 0,7 x 1,1 m	Basket dimensions
+90°/-87° (options)	Basket rotation
+/- 355° (710° continuous)	Turret rotation
2685 Kg	Total weight

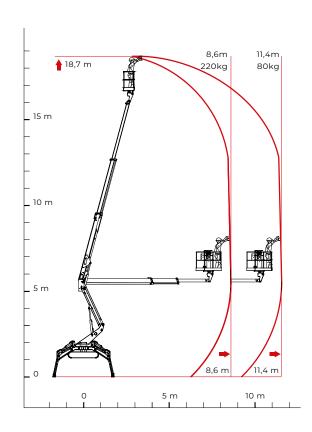

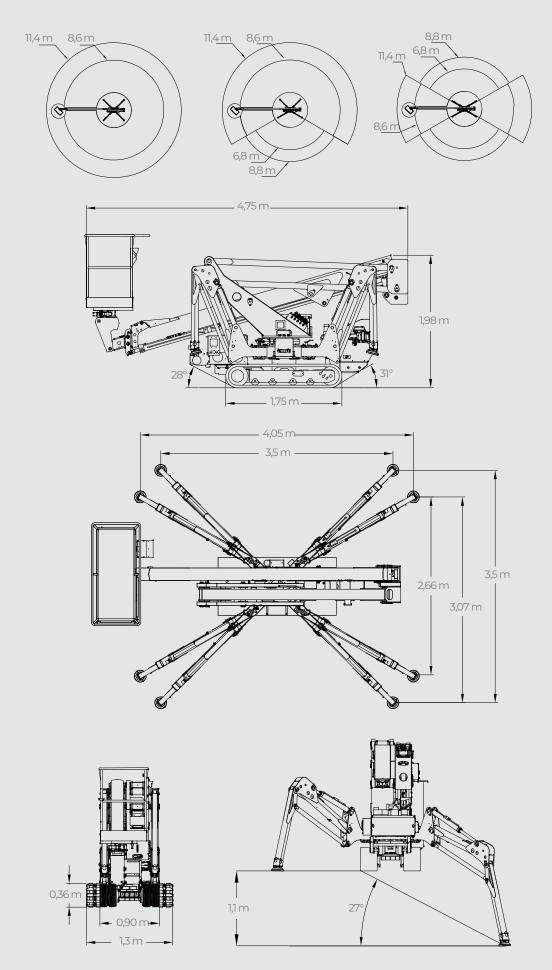

*Technical data may change due to components updates

TECHNICAL DATA

S22HD


PERFORMANCE AND DIMENSIONS




Main features

An articulated platform with a pantograph and a two-stage telescopic boom plus jib. This combination, together with its outriggers of high levelling capacity, three working areas and long horizontal outreach, makes it ideal for all outdoor works, even in extreme conditions.

Max. working height	21,6 m
Max. outreach	12,5 m
Platform height	19,6 m
Max. load in basket	230 kg
Basket dimensions	1,4 x 0,7 x 1,1 m
Basket rotation	+/-90° (options)
Turret rotation	+/- 355° (710° continuous)
Total weigh	3025 Kg

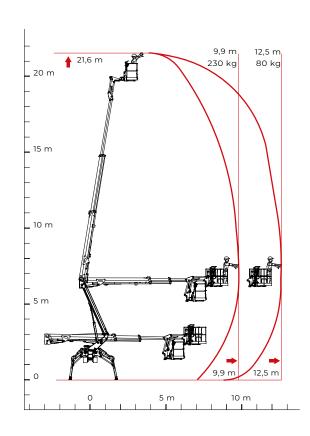


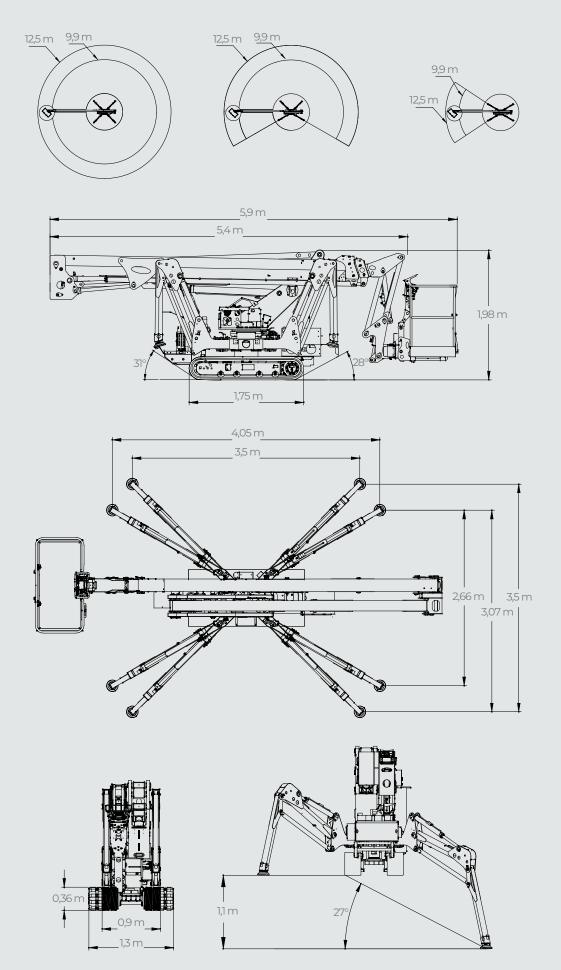

*Technical data may change due to components updates

CMC SELF-PROPELLED CRAWLER PLATFORMS

1 SERIES			
MODEL	MAX. WORKING HEIGHT	MAX. OUTREACH	WEIGHT
S13F	12,9 m	8,5 m	1580 Kg
S15F	14,8 m	8,7 m	2378 Kg
S18F	17,78 m	11,15 m	2495 Kg
LC SERIES			
MODEL	MAX. WORKING HEIGHT	MAX. OUTREACH	WEIGHT
S15	14,9 m	6,9 m	1820 Kg
S20	19,9 m	10,4 m	2980 Kg
S23	23 m	12,4 m	3000 Kg
HD SERIES			
MODEL	MAX. WORKING HEIGHT	MAX. OUTREACH	WEIGHT
S19HD	18,7 m	11,4 m	2685 Kg
S22HD	21,6 m	12,5 m	3025 Kg
DP SERIES			
MODEL	MAX. WORKING HEIGHT	MAX. OUTREACH	WEIGHT
S27	27,3 m	15,4 m	4109 Kg
S30	30,3 m	15,4 m	4285 Kg
S32	32 m	16 m	7255 Kg
XL SERIES			
MODEL	MAX. WORKING HEIGHT	MAX. OUTREACH	WEIGHT
S41	41 m	19 m	13460 Kg
i SERIES			
MODEL	MAX. WORKING HEIGHT	MAX. OUTREACH	WEIGHT
i23	23,3 m	10,3 m	3930 Kg
i27	26,6 m	13,3 m	4680 Kg



Follow us on

F SERIES











C.M.C. s.r.l. Via Bitritto, 119 - 70124 Bari - Italy Tel. +39 080 532 66 06 cmclift.com - info@cmclift.com















